

# Specifications

**MODELS** | GS™-1932


MEASUREMENTS	Metric
Working height maximum*	7.79 m
<b>A</b> Platform height maximum	5.79 m
<b>B</b> Platform length - outside	1.63 m
extended	2.54 m
Slide-out platform extension deck	0.91 m
<b>C</b> Platform width - outside	0.74 m
Guardrail height:	1.10 m
Toeboard height	0.15 m
<b>D</b> Height - stowed: fixed rails	2.00 m
folding guardrails	2.11 m
rails folded	1.75 m
<b>E</b> Length - stowed	1.83 m
Length - stowed extended	2.74 m
<b>F</b> Width	0.81 m
<b>G</b> Wheelbase	1.32 m
<b>H</b> Ground clearance - centre	0.06 m
<b>I</b> - with pothole guards deployed	0.02 m

PRODUCTIVITY	
Maximum platform occupancy - indoor	2
Maximum platform occupancy - outdoor	1
Lift capacity	227 kg
Drive speed - stowed	4.0 km/h
Drive speed - raised	0.8 km/h
Gradeability**	30%
Turning radius - inside	zero
Turning radius - outside	1.55 m
Raise / lower speed	16 / 25 sec
Controls	proportional
Drive	dual front wheel
Multiple disc brakes	dual rear wheel
Tyres - solid non-marking	30 x 11 x 20 cm

POWER	
Power source	24 V (four 6 V 225 Ah batteries)
Hydraulic system capacity	14.2 L

WEIGHT***	
	1,500 kg

STANDARDS COMPLIANCE	CE EN280, PB-10-611-03, AS 1418.10
----------------------	------------------------------------

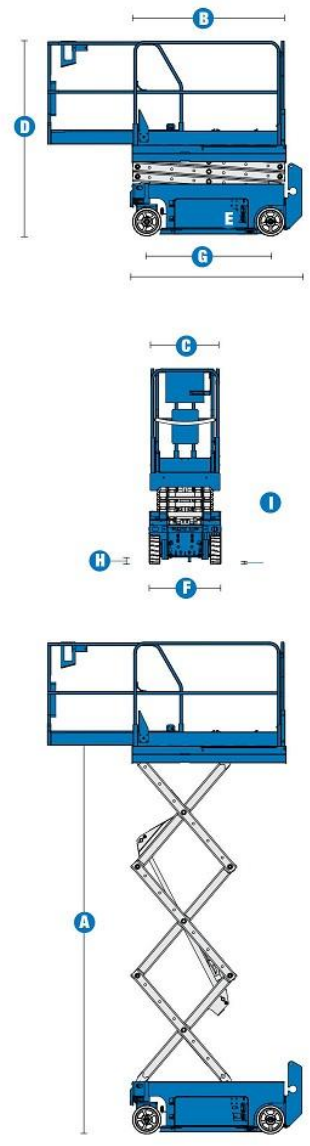

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.  
 \*\*\* Weight will vary depending on options and/or country standards.