

Genie Self-Propelled Scissor Lifts

A TEREX BRAND

GS-2646

Specifications

Models	GS-2646
Measurements	Metric
Working height maximum*	9.92 m
▲ Platform height maximum	7.92 m
▲ Platform height stowed	1.16 m
▲ Platform length - outside	2.26 m
extended	3.18 m
Slide-out platform extension deck	0.91 m
▲ Platform width - outside	1.15 m
Guardrail height	1.09 m
Toeboard height	0.15 m
▲ Height - stowed: folding guardrails	2.26 m
rails folded	1.68 m
▲ Length - stowed	2.41 m
extended	3.31 m
▲ Width	1.17 m
▲ Wheelbase	1.85 m
▲ Ground clearance - center	95 mm
▲ - with pothole guards deployed	0.019 m

Productivity

Lift capacity	454 kg
Lift capacity - extension deck	113 kg
Drive speed - stowed	3.5 km/h
Drive speed - raised	0.8 km/h
Gradeability - stowed	30%
Turning radius - inside	zero
Turning radius - outside	2.29 m
Raise / lower speed	30 / 38 sec
Controls	
Drive	
Multiple disc brakes	
Tires - solid non-marking	38 x 13 x 28 cm

Power


Power source	24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	3.75 gal	14.2 L

Weight****

CE/AUS	2,447 kg
--------	----------

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

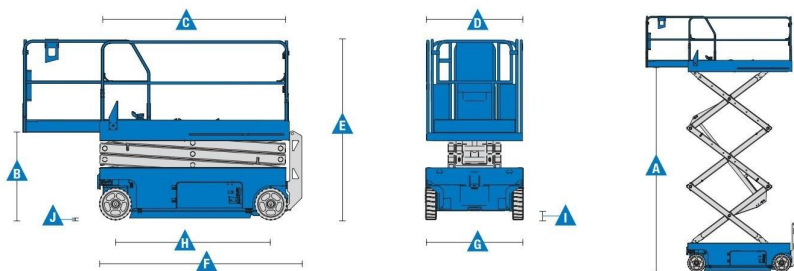

* The metric equivalent of working height adds 2 m to platform height.
 ** CE/AUS markets: Two person maximum occupancy on all models.