

Genie Self-Propelled Scissor Lifts

A TEREX BRAND

GS-3246

Specifications

Models	GS-3246
Measurements	Metric
Working height maximum*	11.75 m
A Platform height maximum	9.75 m
B Platform height stowed	1.29 m
C Platform length - outside	2.26 m
extended	3.18 m
Slide-out platform extension deck	0.91 m
D Platform width - outside	1.15 m
Guardrail height	1.09 m
Toeboard height	0.15 m
A Height - stowed: folding guardrails	2.39 m
rails folded	1.80 m
E Length - stowed	2.41 m
extended	3.31 m
A Width	1.17 m
A Wheelbase	1.85 m
A Ground clearance - center	95 mm
A - with pothole guards deployed	0.019 m

Productivity


Maximum platform occupancy**	2
Lift capacity	318 kg
Lift capacity - extension deck	113 kg
Drive speed - stowed	3.5 km/h
Drive speed - raised	0.8 km/h
Gradeability - stowed	25%
Turning radius - inside	zero
Turning radius - outside	2.29 m
Raise / lower speed	57 / 35 sec
Controls	proportional
Drive	dual front wheel
Multiple disc brakes	dual rear wheel
Tires - solid non-marking	38 x 13 x 28 cm

Power

Power source	24 V (four 6 V 225 Ah batteries)
Hydraulic system capacity	17 L

Weight****

ANSI/CSA	2,364 kg
CE/AUS	2,812 kg

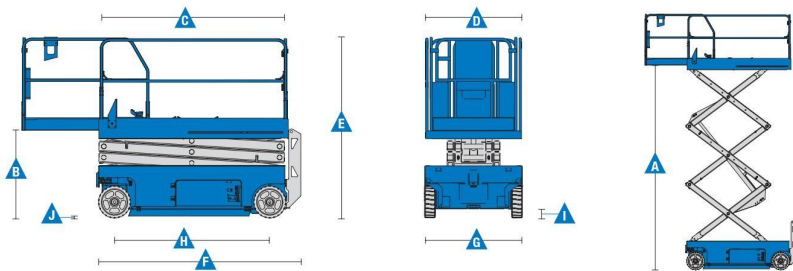

* The metric equivalent of working height adds 2 m to platform height.
 ** CE/AUS markets: Two person maximum occupancy on all models. GS-3246 outdoor maximum occupancy is one person.