

# SELF-PROPELLED SCISSOR LIFTS

## GS™-3268 DC



## Specifications

### MODELS GS™-3268 DC

MEASUREMENTS	Metric
Working height maximum*	11.60 m
<b>A</b> Platform height	9.75 m
<b>B</b> Platform height - stowed	1.31 m
<b>C</b> Platform length - outside	2.51 m
extended	3.96 m
Slide-out platform extension deck	1.52 m
<b>D</b> Platform width - outside	1.55 m
Toeboard height	.15 m
<b>E</b> Height - stowed	2.45 m
rails lowered	1.83 m
<b>F</b> Length - stowed	2.67 m
platform extended	4.19 m
<b>G</b> Width	1.73 m
<b>H</b> Wheelbase	1.85 m
<b>I</b> Ground clearance - center	.20 m

### PRODUCTIVITY


Maximum platform capacity**	4
Lift capacity	454 kg
Extension deck capacity	136 kg
Drive speed - stowed	4.8 km/h
Drive speed - raised	0.8 km/h
Gradeability - stowed***	25%
Turning radius - inside	1.52 m
Turning radius - outside	3.68 m
Raise/lower speed	40/37 sec
Controls	proportional
Drive	dual rear wheel
Multiple disc brakes	dual rear wheel
Tires - foam-filled low profile turf	32 x 56 cm

### POWER

Power source	48 V DC (eight 225 Ah batteries)
Hydraulic system capacity	36 L

### WEIGHT\*\*\*\*

3,587 kg

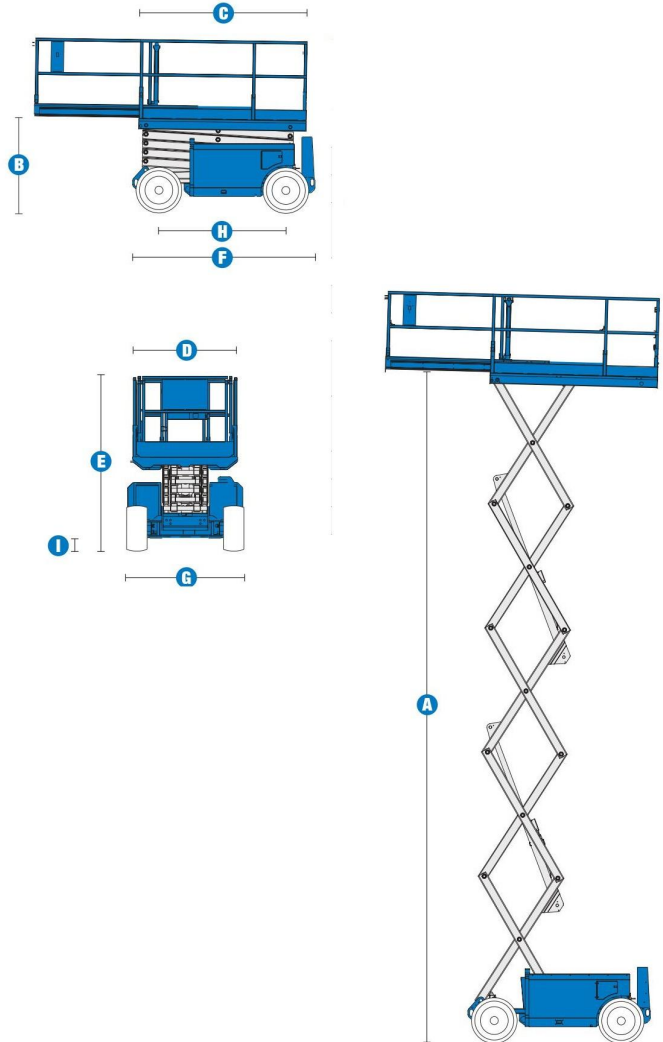

\* The metric equivalent of working height adds 2 m to platform height.  
 \*\* CE/AUS markets: GS-3268 limited to 2 person platform occupancy when used outdoors.