




STAR 10

VERTICAL MASTS

TECHNICAL DATA

STAR 10

Working height	10 m
Platform height	8 m
Horizontal outreach	3 m
Lift capacity	200 kg
Platform size	0.78 x 0,98 m
D Length	2.7 m
B Width	1 m
A Height - stowed	1.99 m
Tailswing	0 cm
C Wheelbase	1.2 m
E Ground clearance	10 cm
Driveable at full height up to	8 m
Drive speed proportional	0.6 - 5 km/h
Turning radius - outside	1.88 m
Turntable rotation	345°
Vertical jib rotation	130° (+70°/-60°)
Tires - non marking	16x5x10.5
Tilt alarm	3 °
Gradeability	25 %
Hydraulic system capacity	7 l
Power source	24 V - 250 Ah
Weight	2 677 kg

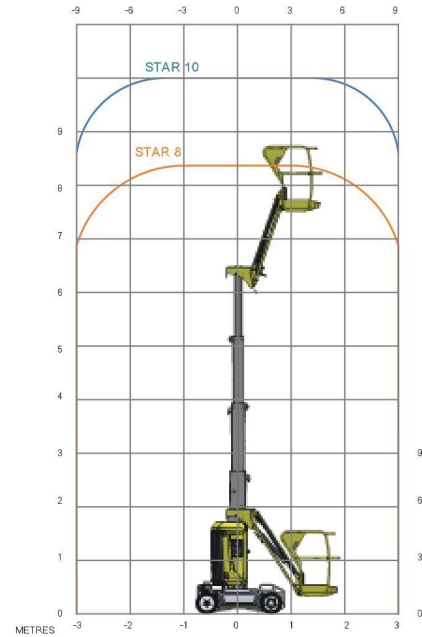

STANDARD EQUIPMENT

- 24 V electric drive brushless AC motors
- 24 V – 250 Ah traction batteries
- 35 A battery charger
- Battery charge indicator
- On-board diagnostic tool Haulotte Activ'Screen
- Centralised battery filling
- Forklift tine pockets
- Towing hooks and lifting eyes
- Passive potholes
- 2 rear steering wheels
- 2 front driving wheels
- Non-marking tires
- Brake release
- Hourmeter
- Horn
- Emergency stop buttons at cage and ground level
- Load controller in the platform
- Emergency hand pump
- 2 control stations at cage and ground level
- 2 rings in the platform for safety harnesses
- Travel alarm

