
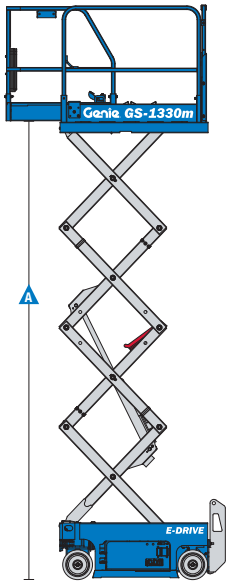



# Self-Propelled Scissor Lifts

GS™ -1330m

## Specifications



Models	GS™-1330m	
Measurements	Metric	US
Working height maximum*	5.9 m	18 ft 10 in
▲ Platform height maximum	3.9 m	12 ft 10 in
▲ Platform height - stowed	0.90 m	2 ft 11 in
▲ Platform length - outside	1.26 m	4 ft 2 in
extended	1.72 m	5 ft 8 in
Slide-out platform extension deck	0.46 m	1.5 ft
▲ Platform width - outside	0.67 m	26.5 in
Guardrail height	1.10 m	3 ft 7 in
Toeboard height	0.15 m	6 in
▲ Height - stowed: fixed rails	2.02 m	6 ft 7.5 in
folding rails	2.02 m	6 ft 7.5 in
rails lowered	1.68 m	5 ft 6 in
▲ Length - stowed	1.41 m	4 ft 8 in
- stowed extended	1.87 m	6 ft 2 in
▲ Width	0.78 m	30.5 in
▲ Wheelbase	0.98 m	3 ft 3 in
▲ Ground clearance - centre	6 cm	2.4 in
- with pothole guards deployed	2 cm	0.63 in

## Productivity

Max platform occupancy (indoor/outdoor)**	2/-	2/-
Lift capacity	227 kg	500 lb
Lift capacity - extension deck	91 kg	200 lb
Drive height	Full height	
Drive speed - stowed	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph
Gradeability - stowed***	25%/14°	25%/14°
Turning radius - inside	40 cm	15.7 in
Turning radius - outside	1.55 m	5 ft 1 in
Raise/lower speed	20 / 24 sec	
Controls	Proportional	
Drive	dual rear wheel, electric	
Brakes	dual rear wheel, electric	
Tyres solid non-marking	25.4 x 7.62 cm	10 x 3 in

## Power

Power source	24 V DC (two 12 V 85 Ah batteries)	
Hydraulic system capacity	1.5 gal	5.6 L

## Weight\*\*\*\*

	885 kg	1,950 lb
--	--------	----------

## Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280);  
2004/108/EC (EMC); 2006/95/EC (LVD)

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Indoor use only for the GS-1330m

\*\*\* Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.